


SCALE 1:1

© = CRITICAL DIMENSION  
 STANDARD TOLERANCES UNLESS NOTED:  
 ALL DECIMAL DIMENSIONS ± .005  
 ALL ANGLES ± 1°

INDUSTRIAL CONTROL EQUIPMENT  
 LINE INPUT RATING 120 VAC +10% -15%  
 50/60 HZ SINGLE PHASE. THIS UNIT MUST BE  
 ENCLOSED. USE NEC CLASS 1 WIRING RATED  
 60C/75C. USE 14-20 GA COPPER ONLY FOR LINE  
 AND LOAD CONNECTIONS. TORQUE TERMINALS  
 TO 5 IN. LB. REPLACE FUSE WITH TYPE 3AG FAST  
 ACTING 3 AMP 250 V ONLY. FAILURE TO COMPLY  
 WITH THESE REQUIREMENTS WILL VOID  
 MANUFACTURERS WARRANTY.

DO NOT USE SLOW BLOW FUSES  
 LINE VOLTAGE  
 102VAC TO 132 VAC MAX  
 50-60 HZ

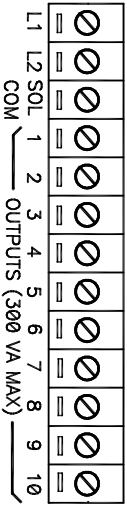

WIRE STRIP GAUGE  
 0.250 IN. MAX

NO.		CHANGES		BY/DATE		NAME	
		APPD		DWN BY		DCT500A SERIES LOW COST TIMER CONTROLLER	
		CHKD		DATE			
		ACAD2002					
		3					

MATERIAL		FR. NO.	
FINISH		Dwyer Instruments, Inc.	
		MICHIGAN CITY, INDIANA 46360 U.S.A.	

NOTICE: This drawing and the principles and elements of design embodied therein are the exclusive property of DWYER INSTRUMENTS, INC. and are not to be communicated, disclosed, reproduced or used except as previously authorized in writing by such corporation and must not be submitted to outside parties for examination without the written consent of said corporation.